

ST-5000

Gooseneck Microphone Combo

Thanks for choosing JTS ST-5000 Gooseneck Microphone. In order to obtain the best efficiency, you are recommended to read this manual before applying.

The ST-5000 is the easiest gooseneck mic can be found. Designed with Push ON/Push Off switch and XLR male output it meets basic requirements for all installed applications.




FEATURES

- < Supercardioid pick up pattern
- < Push ON/OFF
- < LED indicator
- < Balanced XLR male output

PARTS IDENTIFICATION

1. Capsule
2. Gooseneck
3. LED Indicator
4. ON / OFF Switch
5. 3P XLR-Male Connector

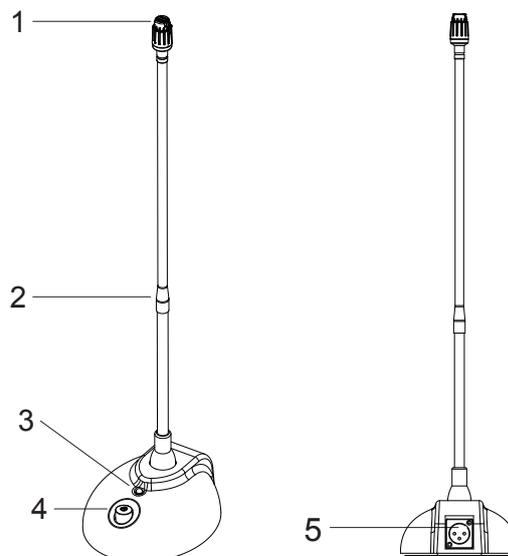

SPECIFICATION

TYPE: Back Electret Condenser

FREQUENCY RESPONSE: 80~18,000Hz

POLAR PATTERN: Supercardioid

OUTPUT LEVEL(at 1,000 Hz): $-60 \pm 3 \text{ dB}^* (1\text{mV})^* 0\text{dB}=1\text{V} / \mu\text{bar}$

IMPEDANCE: 220Ω

MAX. SPL FOR 1% THD: 125dB

POWER SUPPLY: 12-48 VDC Phantom power

CURRENT CONSUMPTION: $\leq 5.8\text{mA}$


OUTPUT CONNECTOR: XLR-M type

SWITCH : Push ON/OFF


GOOSENECK LENGTH: 368mm

BASE DIMENSIONS: 96mm(W)*46mm(H)*113mm(D)


NET WEIGHT: 541 grams

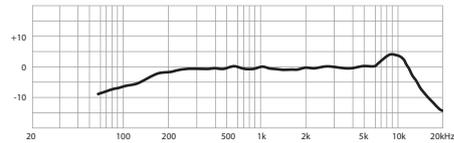

Frequency response



DIMENSIONS

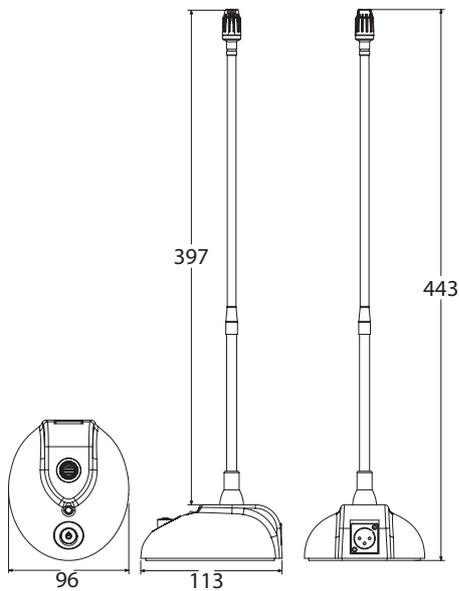

www.jts.com.tw



59010-090-02