



ST-5800


Chime Microphone

Thanks for choosing JTS ST-5800 Chime Microphone.
In order to obtain the best efficiency, you are recommended to read this manual before applying.



The ST-5800 is designed for public addressing.
The talk and chime modes are programmable.
There are PUSH-TO-TALK and PUSH ON/PUSH OFF for choices.
Mode of full Chime, Start Chime only and No Chime are available for users' preference.
This unit is powered by DC power supply.
Volume of chime and voice can be adjusted separately.

PARTS IDENTIFICATION


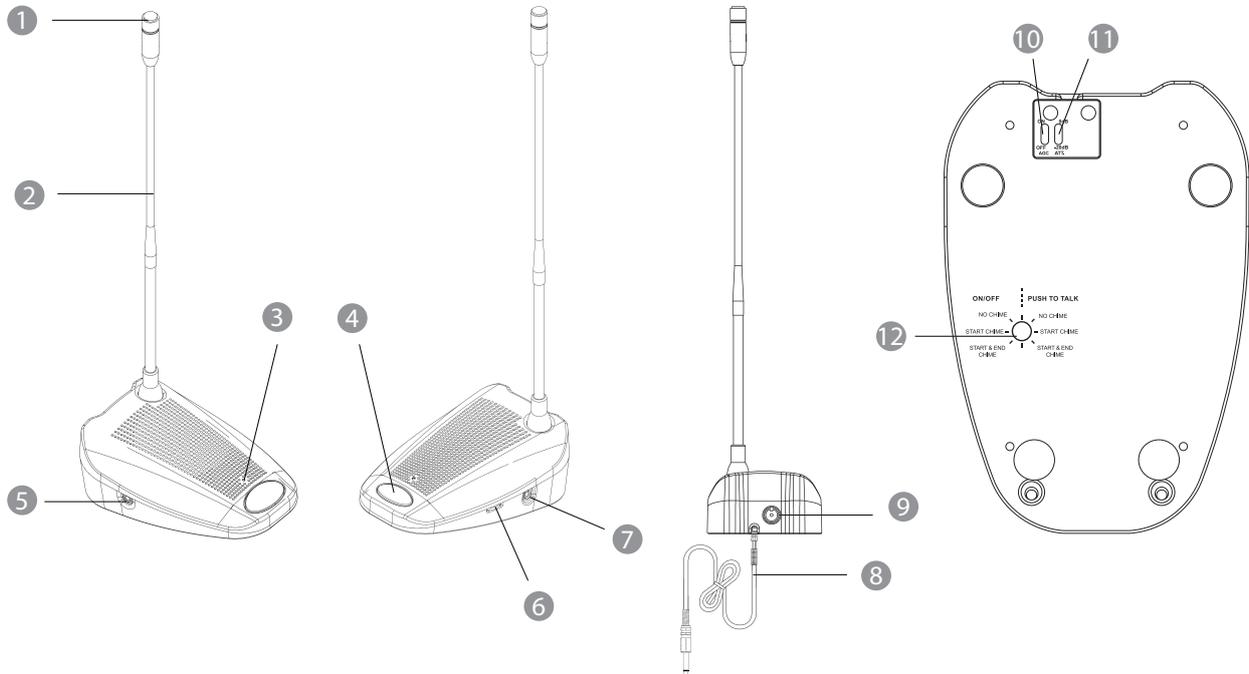


- | | | |
|-----------------|---------------------------|---------------------|
| ① Capsule | ⑥ Microphone Volume | ⑩ AGC On/Off Switch |
| ② Gooseneck | ⑦ Chime Volume | ⑪ ATT. Switch |
| ③ LED Indicator | ⑧ Ø6.3mm Plug +1.5M Cable | ⑫ Mode Selector |
| ④ Talk Switch | | |
| ⑤ Power Switch | | |

SPECIFICATION

Pick Up Pattern: Supercardioid
Operation Voltage: 12~15 VDC, 100mA
Chime Tone: Up/ Down and OFF
Frequency Response: 100Hz ~ 15KHz
Output Level: 0/-20dB Selectable
Volume Adjust: Tone and Microphone
Output: Unbalanced Ø6.3mm Plug
With 1.5M Cable

SWITCH : Push ON/OFF , Push To Talk
GOOSENECK LENGTH: 368mm
BASE DIMENSIONS: 96mm(W) x 46mm(H) x 113mm(D)
NET WEIGHT: 541 grams

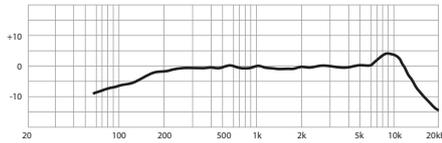

Frequency response

DIMENSIONS

