



APPLICATIONS

- Band P.A.
- Personal monitor
- Small theatres
- Auditoriums
- Piano bar
- DJ
- Stage monitor
- Conference rooms
- Fixed installations in live clubs
- Pubs
- Gyms

KEY FEATURES

- 2-way bi-amplified system
- Plywood cabinet
- FBT custom 12" LF woofer / 2" voice coil
- FBT 1" throat / 1,4" voice coil HF compression driver
- 800/200W RMS built-in amplifier LF/HF
- 35° monitor taper
- Universal switching mode power supply 100-240Vac
- M10 rigging points
- 4 DSP presets



PRODUCT DESCRIPTION

The FBT X-PRO 12A series speakers with integrated mixer feature lightweight, yet rugged plywood cabinet with anti-scratch coating and internal ply reinforcement construction. Available in black finish the FBT X-PRO 12A series speakers modern cabinet appearance provides fixed installations with an elegant design that blends into any decor. The asymmetrical shape of the FBT X-PRO 12A cabinet also allows use as a powered floor stage monitor. The FBT X-PRO 12A is two way design incorporating a 12" low frequency woofer and 1" HF compression driver coupled to a 80°H x 50°V constant directivity rotatable horn. With a frequency range of 50Hz - 20kHz the FBT X-PRO 12A speakers provide high fidelity sound for both speech and music applications with a maximum SPL of 127dB. The bi-amplified FBT X-PRO 12A active speaker feature a 800W RMS low frequency amp and a 200W RMS high frequency amp. The control panel features XLR input and link out, 6,3mm jack stereo input with volume, stereo RCA input with volume, XLR output selector coupled with stereo/mono, HP filter, mic/line, DSP preset selector, prt/lmt led indicator. 2 x M10 rigging points built into the cabinet along with the optional mounting brackets allow the FBT X-PRO 12A speaker to be surface mounted on walls or ceilings. A standard 1,38" speaker stand socket allows the FBT X-PRO 12A to be mounted on speaker stand. A front face steel grille protects the speaker from external damage.

ELECTRONIC SPECIFICATIONS

System Type	2 Way
Internal amplifiers* max. LF/HF	800W / 200W RMS
Input Impedance	22 kOhm
Frequency Response	50Hz - 20kHz (@-6dB)
Maximum SPL peak **	127dB
Dispersion	80° H x 50°V rotatable
AC Power Requirement	300VA

PHYSICAL SPECIFICATIONS



Low Frequency Woofer	12" / 2" coil
High Frequency Driver	1" / 1,4" coil
Input Connectors	XLR-Jack with loop
Net Dimensions (WxHxD) inch	14,52 x 25,19 x 14,56
	mm
	369 x 640 x 370
Shipping Dimensions (WxHxD) inch	18,30 x 28,14 x 18,30
	mm
	465 x 715 x 465
Net Weight	39,68 lbs
Shipping Weight	45,85 lbs
Enclosure Material	plywood
Grille	Steel with powder coat black paint finish
Power Cord	16,4ft / 5mt

* Max.: 2mS burst, rms power on nominal speaker impedance



** Peak SPL: free space, based on max. peak power amp rating and system peak sensitivity, 10mS time average

DIAGRAMS


Horizontal polar diagrams

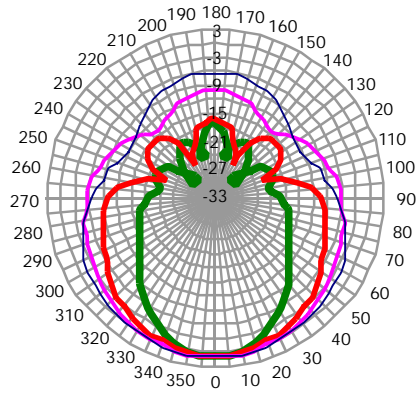


Horizontal polar diagrams

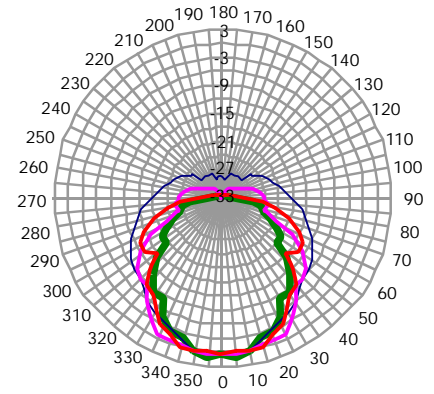



Vertical polar diagrams

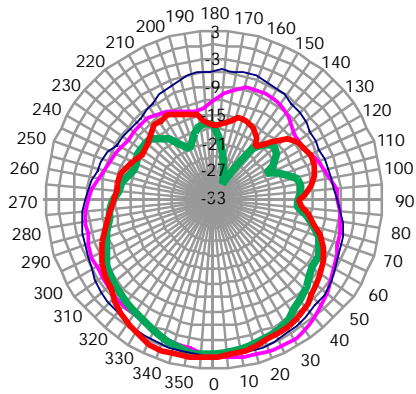


Vertical polar diagrams

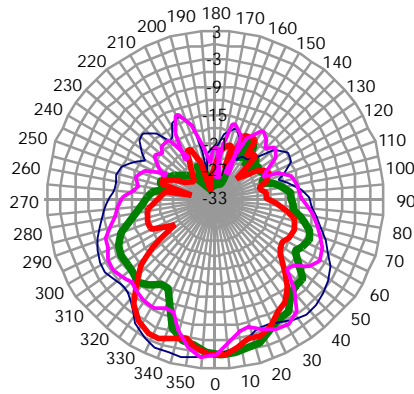



Vertical polar diagrams

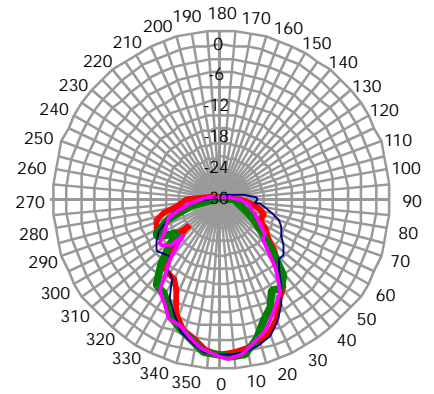


Full Space Frequency Response

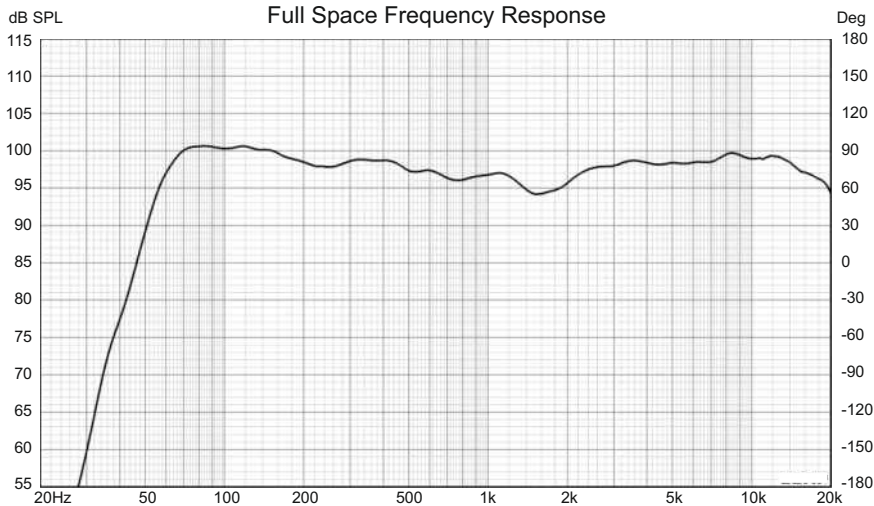

Vertical polar diagrams

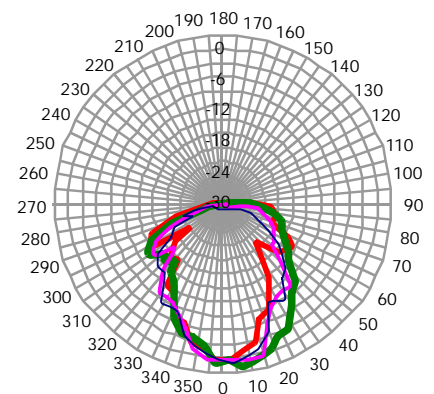


DIMENSIONAL DRAWINGS

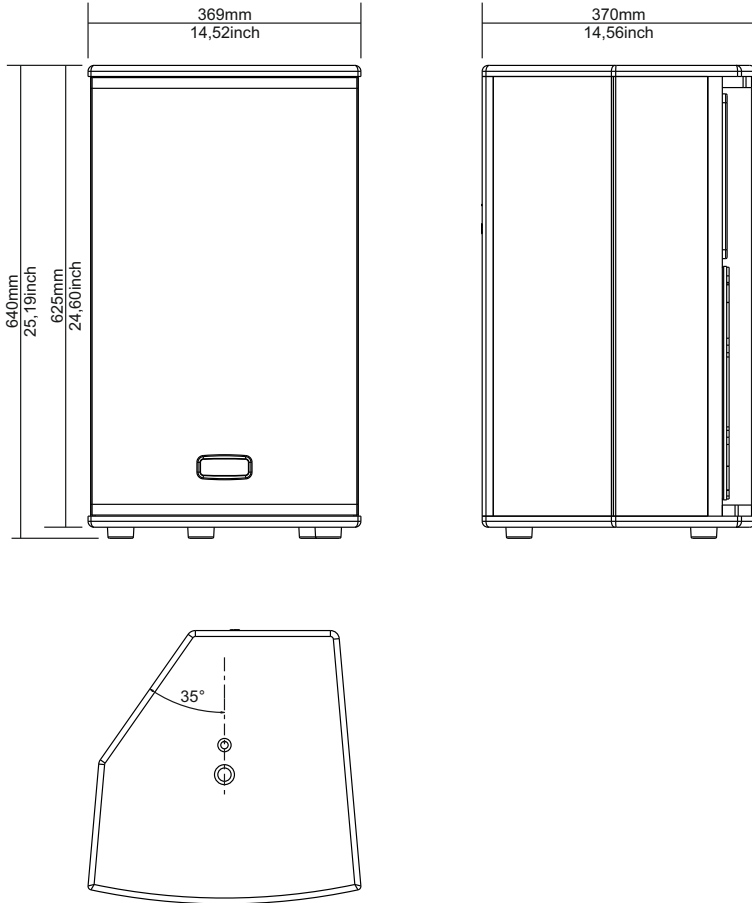

CONTROL PANEL



ACCESSORIES

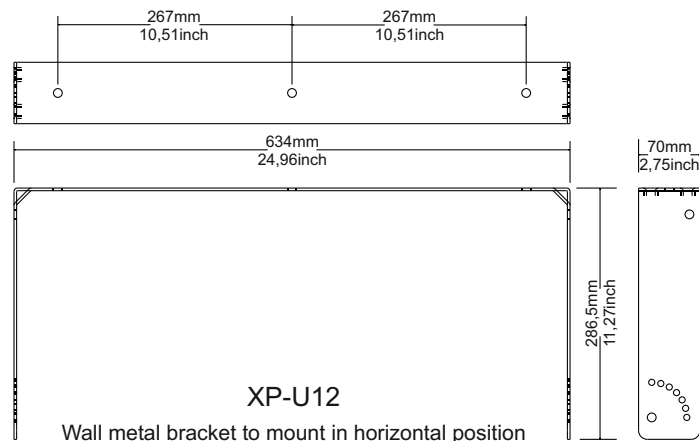

XP-U12

Wall metal bracket to mount in horizontal position